



gloworm

performance products



adventure

EXPERIENCE THE REVOLUTION

Congratulations! You are now the owner of a Gloworm X2.

Prepare to Experience the Revolution in LED Adventure Lighting!

Safety Instructions

An alternative light source should be carried at all times.

Heat Generation

The aluminium light-head is designed to draw heat away from the LED. The process works effectively when air is flowing over the light. However, the light can become hot if left stationary on its higher settings. It is recommended that the light is set to a lower setting when stationary for more than a few minutes.

Important! If the light is being used in a stationary state and it begins to become hot it will automatically reduce current as a measure to reduce the light's temperature and protect the electronic components. Constant operation at high is only possible with continuous air flow.

Battery Care

- Never leave a battery unattended whilst charging,
- A battery should never be exposed to direct heat,
- Only use the supplied li-Ion charger when charging the battery,
- Batteries do not need to be discharged before charging, frequent charging will not cause harm to your battery.
- When storing your battery, ensure it is at charged to at least 50% capacity. Store in a cool dry environment inside an airtight container.

Mounting the X2

Helmet Mounting

The X2 uses a quick release (QR) helmet mount system, which can also be used with similar GoPro mounting systems. The mount consists of the QR Base and a QR Clip. The base is mounted to the helmet with the supplied Velcro (or cable ties) and the clip is attached to the light. The clip then slides securely into the base and is removed by gently squeezing the two arms.



Bar Mounting

The X2 is mounted to the bar using the supplied QR Bar mount. The bar mount is designed to be used with a 31.8mm handlebar. A 35mm version is available. No shim is required when using the QR Bar Mount. The Bar Mount is constructed from carbon fibre reinforced nylon and will grip either alloy or carbon bars without causing damage.

Headstrap (Optional Accessory)

The Headstrap is fitted with a QR Base. Simply attach the QR Clip to the X2 and slide into place. Adjust the straps to your preference.



Switch Mount

The switch mount provides a secure location on which to mount the remote switch when using the X2 on the handlebars. Attach the mount to your preferred location using the included cable ties then apply a velcro pad (supplied). Ensure the cable recess is positioned in the direction of the cable.



Mounting the Battery

The battery can be attached/placed in any location that suits the user, i.e. Top tube, back pack shoulder strap, in back pack, in riding jersey etc. To ensure there is enough cable to reach your desired battery location use the provided extension lead. A protective adhesive foam strip is supplied. The battery is not designed to hang from the integrated loop - this is a guide to ensure the battery does not slide (see pic below).



Battery

Voltage Indication

The battery's fuel gauge allows the user to monitor the battery capacity at a glance. There are 8 LEDs that indicate the charge in 10% increments when charging and whilst in use. The indication consists of 2 red LEDs (0-25%), 2 orange LEDs (25-50%) and 4 green LEDs (51-100%). When voltage reaches a critical level the X2 will alert the user by emitting a quick flash sequence.

Charging

The X2 is supplied with a Li-Ion Smart Charger. The charger has an LED indicator to let the user know when the battery has completed the charging process. Simply plug the charger into the wall socket (power off) and then connect the battery to the charger – the LED indicator will glow GREEN. Turn the power on at the wall socket and the indicator will glow RED and the charging process will commence. Charging is complete when the indicator glows GREEN.

Important! Always disconnect the battery from the light when not in use! The small amount of power used by the electronics will discharge the battery, additionally the lamp may be switched on accidentally and consequently cause an uncontrolled heat build-up. If you intend not to use the lamp for a longer period of time, fully charge the battery and store in a cool and dry place.

Quick Start and Operation

Overview

The X2 is operated using the remote switch. Operation of the X2 is through different types of button press:

CLICK	quick press, less than 1 second
DOUBLE CLICK	similar to that used with a computer mouse
PRESS	2 to 3 seconds
HOLD	hold button in the down position

The X2 is pre-loaded with two default programmes each of which can be customised to your needs (detailed in the next section). Each programme features 'Normal Operation Modes' (NOM) and one 'Special Mode' (SM).

Start

Once the battery is connected, the X2 is ready to be used. **CLICK** to start the light in **TRAIL** programme (Default 1). **DOUBLE CLICK** to start in **COMMUTER** programme (Default 2). NOMs (High, Low, etc) are cycled using a **CLICK**. The SM is accessed with a **PRESS** of the switch from any NOM. A **CLICK** of the switch will return the X2 to NOM.

To turn off the X2, **HOLD** the remote switch. The light will cycle through SM, then it will turn off.

Programme Matrix (Factory Settings)

	Special Modes	Normal Operation Modes		
Trail Programme (Default 1) CLICK to start	Special Mode DIM 200 Lumens 36 hrs runtime	LOW 500 Lumens 7 hrs runtime	MED 900 Lumens 3 hrs runtime	HIGH 1500 Lumens 1.5 hrs runtime
Commuter Programme (Default 2) DOUBLE CLICK to start	Special Mode FLASH 700/300 Lumens 5 hrs runtime	LOW 500 Lumens 7 hrs runtime	HIGH 800 Lumens 3.5 hrs runtime	

Light Level/Runtime Matrix (Customised)

10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
36hr	19hr	11hr	7hr	5hr	4hr	3hr	2.5hr	2hr	1.5hr
200lm	250 lm	350 lm	490 lm	650 lm	770 lm	900 lm	1100 lm	1250 lm	1500 lm

Special Modes (SM)

DIM (like a flashlight, good for reading, small closeup tasks)	36hrs	FLASH (light flashes high-low-high-low every second)	5hrs	BEACON (1 bright flash, followed by a 3 second pause)	48hrs
--	-------	--	------	---	-------

IMT and Programme Customisation

Intelligent Mode Technology (IMT) allows the X2 to be refined for any adventure. The X2 is loaded with two programmes that can be customised on the fly.

DEFAULT 1 - Special Mode and three light level modes

DEFAULT 2 - Special Mode and two light level modes

The user can adjust the brightness of each light level mode in addition to being able to select the type of SM for each programme (DIM, FLASH or BEACON).

Light Level Brightness Customisation (NOM)

1. Switch the light to the NOM (light level) you wish to adjust. 2. **DOUBLE CLICK**, the light will give 2 quick flashes indicating you can commence customisation. 3. Increase the brightness in 10% increments using a **CLICK** (when 100% brightness is reached the light will give 2 quick flashes), dim the brightness by **HOLDING** the button. 4. Once the desired brightness has been reached, **DOUBLE CLICK** to return to normal operation.


Special Mode Customisation (SM)

1. When in SM, **DOUBLE CLICK** the button. 2. The light will give 2 quick flashes indicating you can select your preferred SM. 3. Cycle through the three options using a **CLICK**. **DIM** is indicated by a dim light, **FLASH** is indicated by two flashes every 1 sec and **BEACON** is indicated by a quick bright flash at 2 second intervals. 4. Once the desired SM has been selected, **DOUBLE CLICK** to return to normal operation.

Master Reset

When the light is off, **HOLD** the button for 15 seconds to restore to factory settings. After 15 seconds the light will flash rapidly 10 times and then turn off. This indicates

Operation Chart

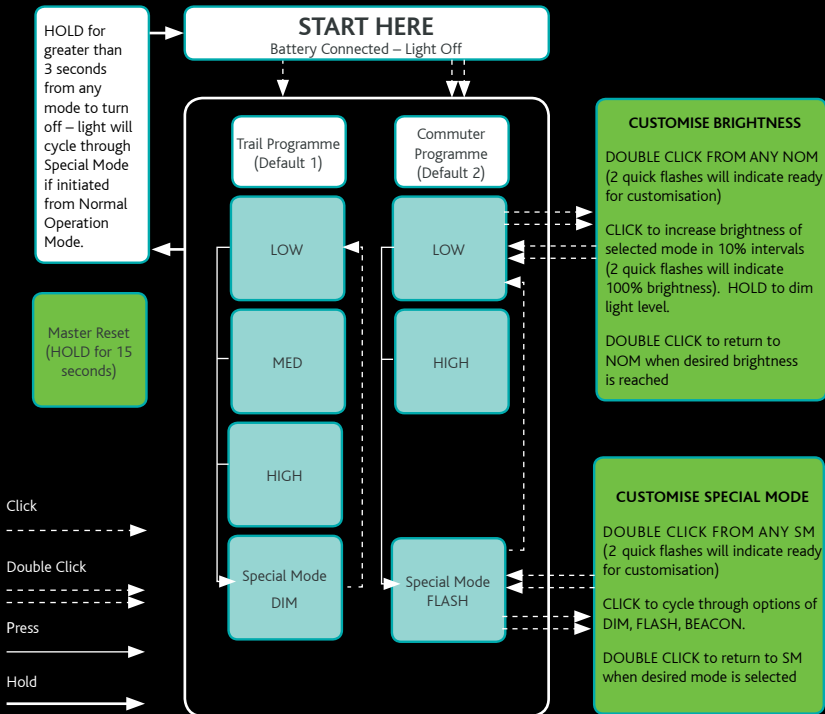

Battery Care

The following steps should be taken to conserve the life of your battery.

- Always store your battery in a cool dry location
- Prior to storage, ensure your battery is charged to 50-70% (not full)
- Your battery will not develop a memory, you can charge and discharge as you like
- Keep your battery away from direct heat sources
- Only charge using a smart charger, an addition to the batteries protective circuit, this will prevent over charging
- Optimal battery use is between 15% and 85%. Our batteries are designed not to exceed these limits. Feel free to charge and discharge as needed
- A battery should be able to complete 500 cycles prior to losing capacity.
- Part charges and discharges are not equal to a full cycle. Several part cycles are better for the battery than 1 'full' cycle.

For more information on your battery go to www.batteryuniversity.com

POOR BATTERY CARE WILL VOID WARRANTY

Changing the Optics

The X2 is supplied with 2 installed optic lenses. Additional optics are included in the light system kit. To change optics follow to the process below:

1. Remove the X2 from the battery.
2. Remove the two front screws using the supplied 2mm hex tool.
3. Now remove the front plate, the protective lens and the o-ring.
4. Carefully remove the optic; you will now see the LED – TAKE CARE: Do not touch the LED or the electronic board/connections, doing so will leave body oils on the surfaces and potentially damage the light.
5. Place the new optic/s into the X2 so the top of the optic is flush with the front of the housing.
6. Replace the o-ring, the protective lens and the front plate.
7. Tighten the front screws until the front plate is flush with the housing. Do not over tighten.

**ANY OTHER DISASSEMBLY OR MODIFICATION OF THE LIGHTHEAD/BATTERY/
CHARGER WILL RESULT IN VOIDING THE MANUFACTURER'S WARRANTY.**

Video Tutorials

Gloworm tutorials can be found at www.youtube.com/glowormproducts

Tell us what you think!

We would really like to hear what you think about your Gloworm X2. You can provide feedback by posting a review on www.mtbr.com or by sending an email to reviews@glowormlites.co.nz.



www.glowormlites.co.nz



EXPERIENCE THE REVOLUTION